

FIG. 1

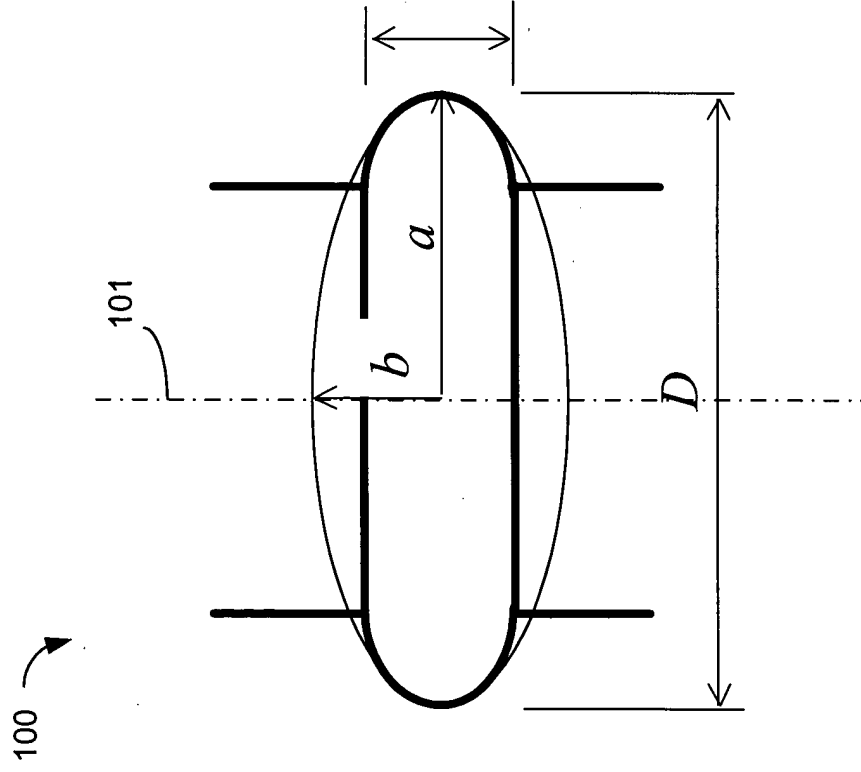


FIG. 2A




FIG. 2B





FIG. 2C

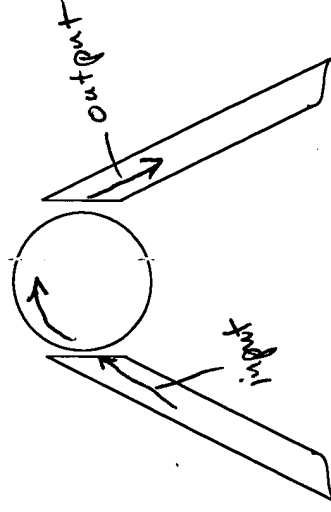

FO22ED" 2489T860

FIG. 3

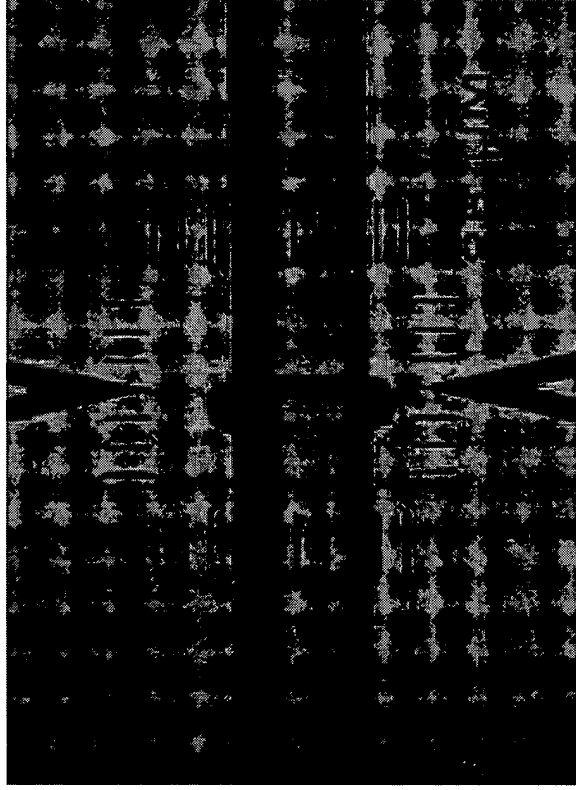


FIG. 4

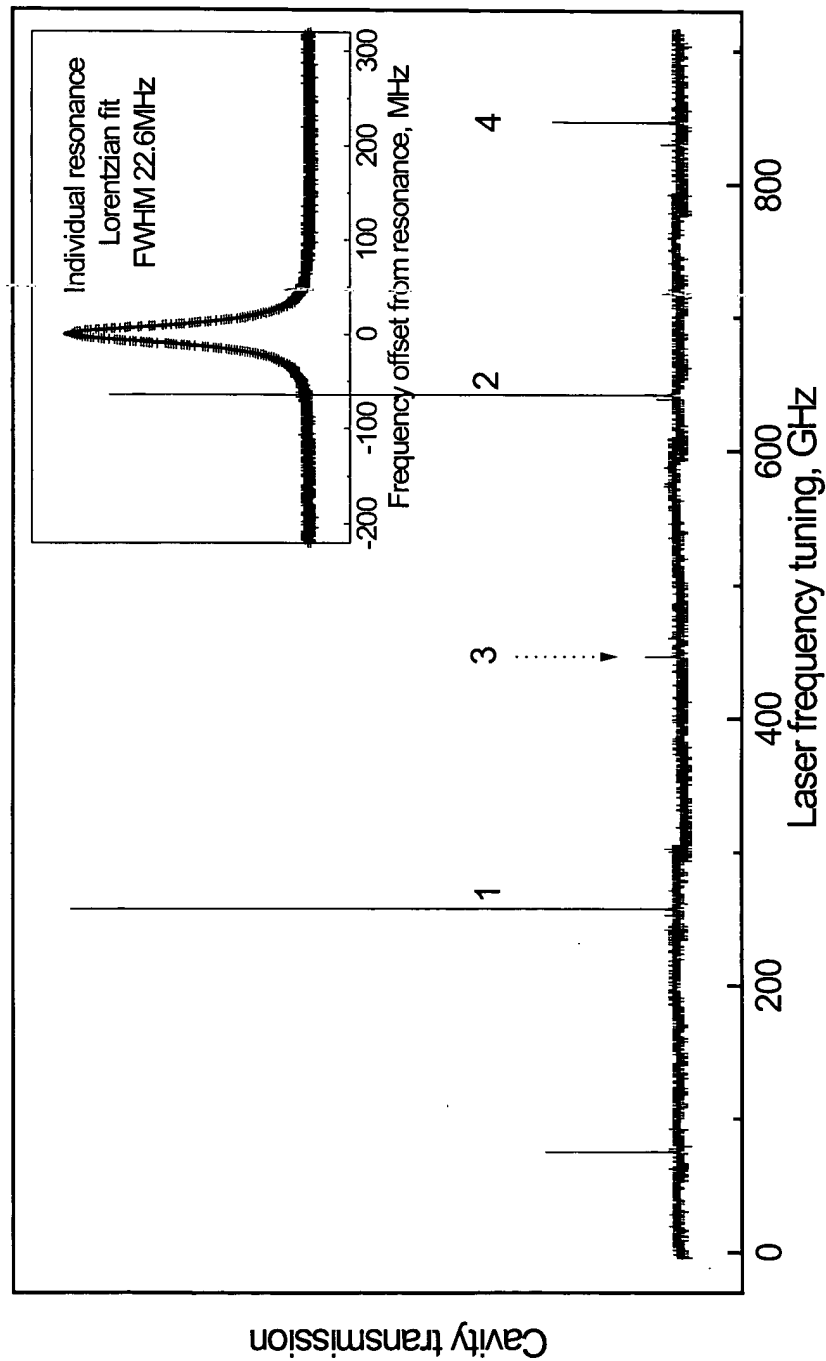


FIG. 5A

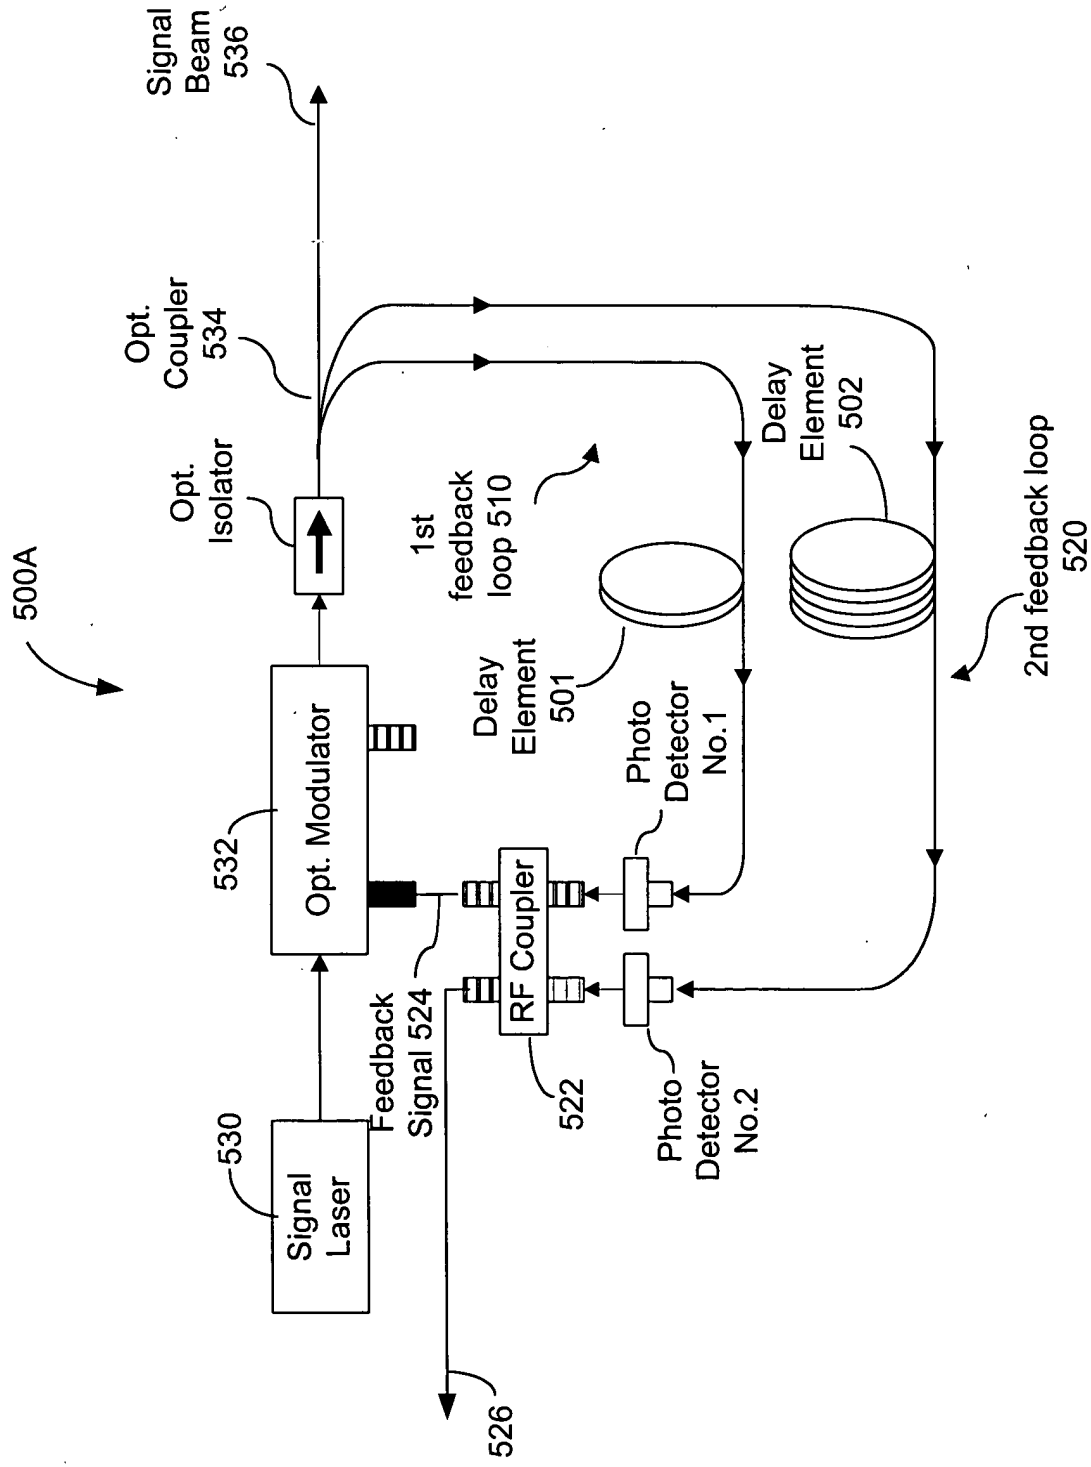


FIG. 5B

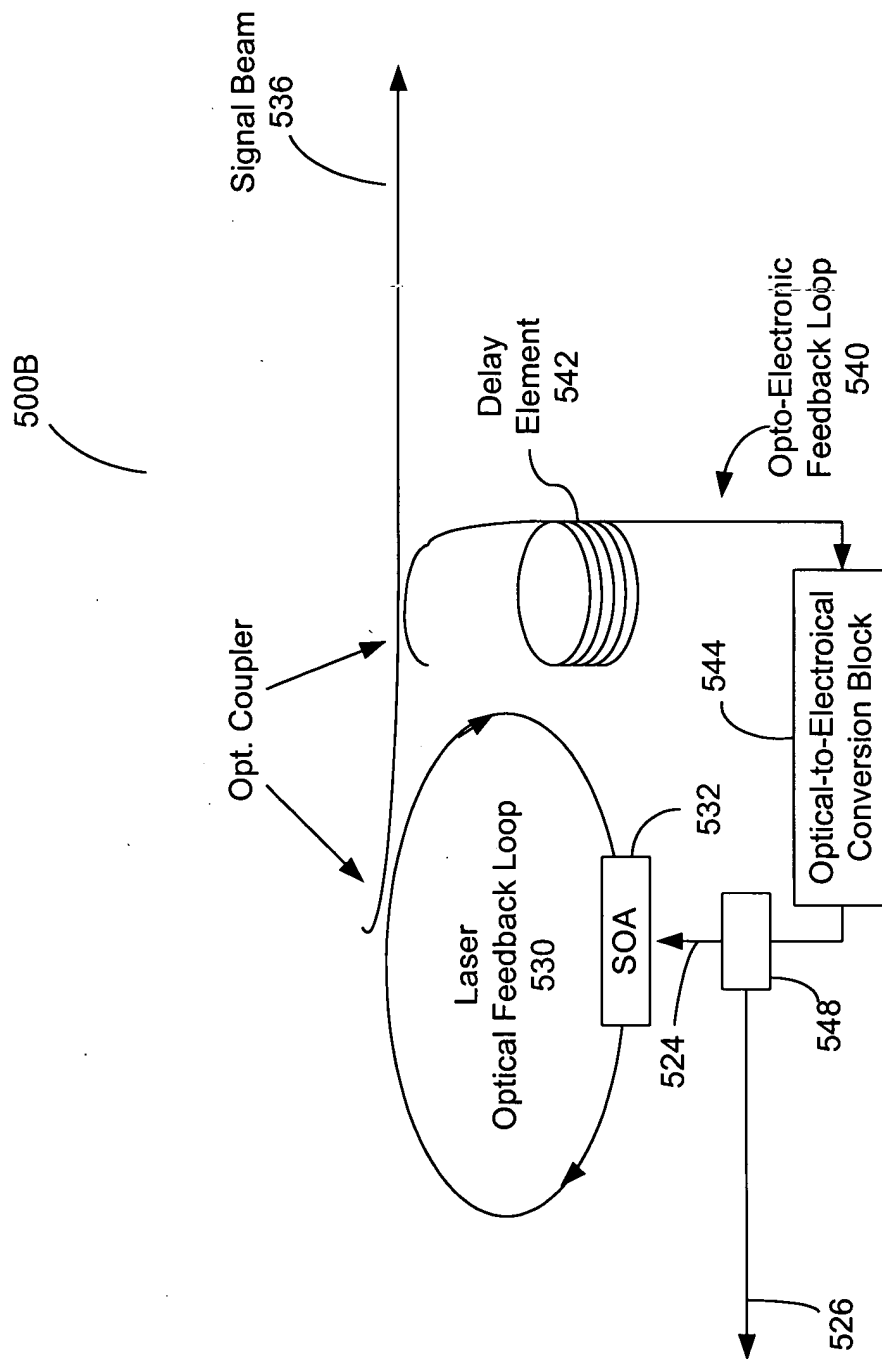


FIG. 5C

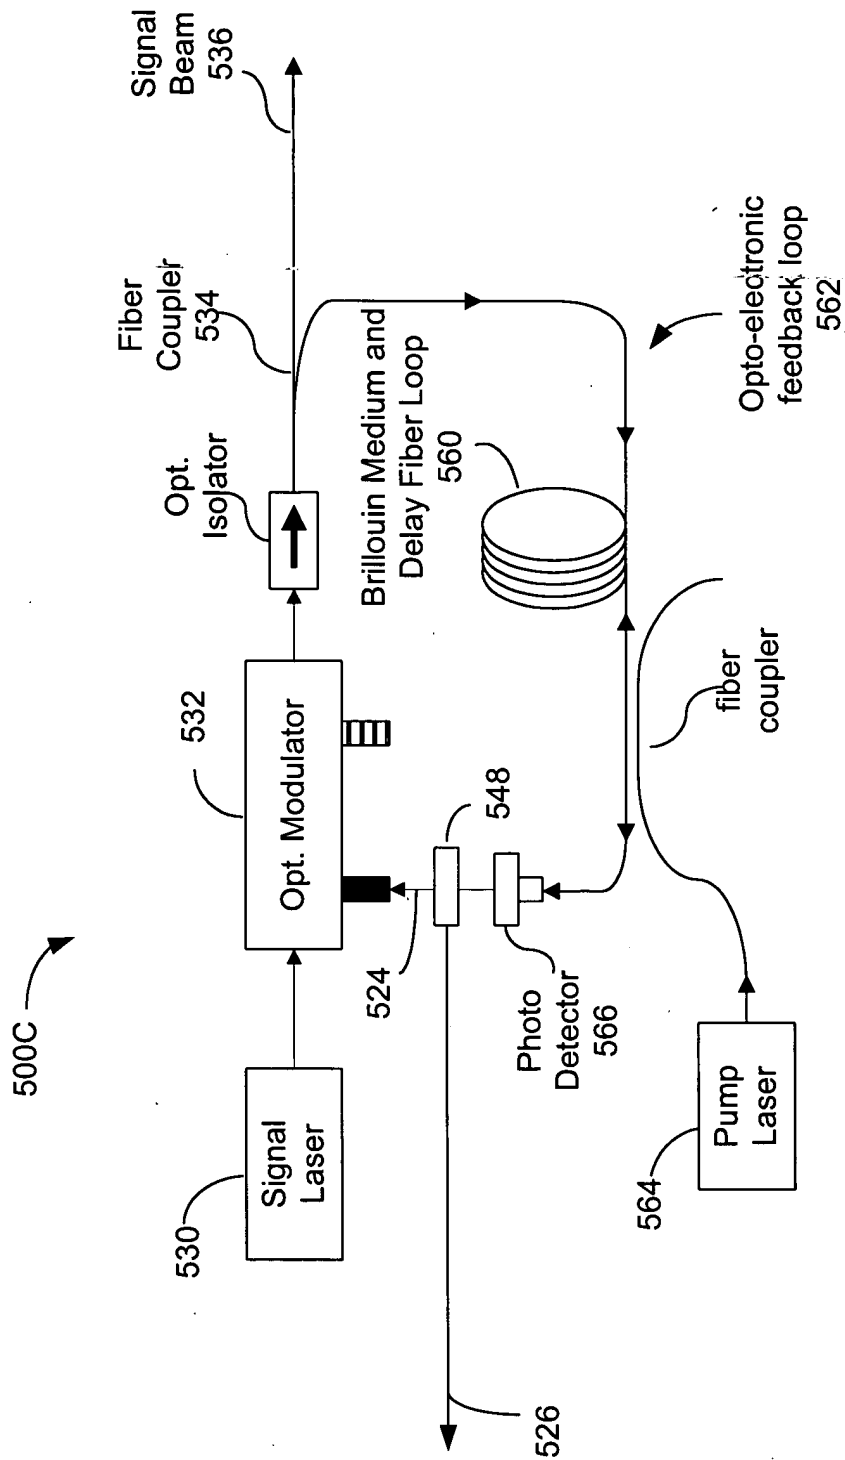


FIG. 6A

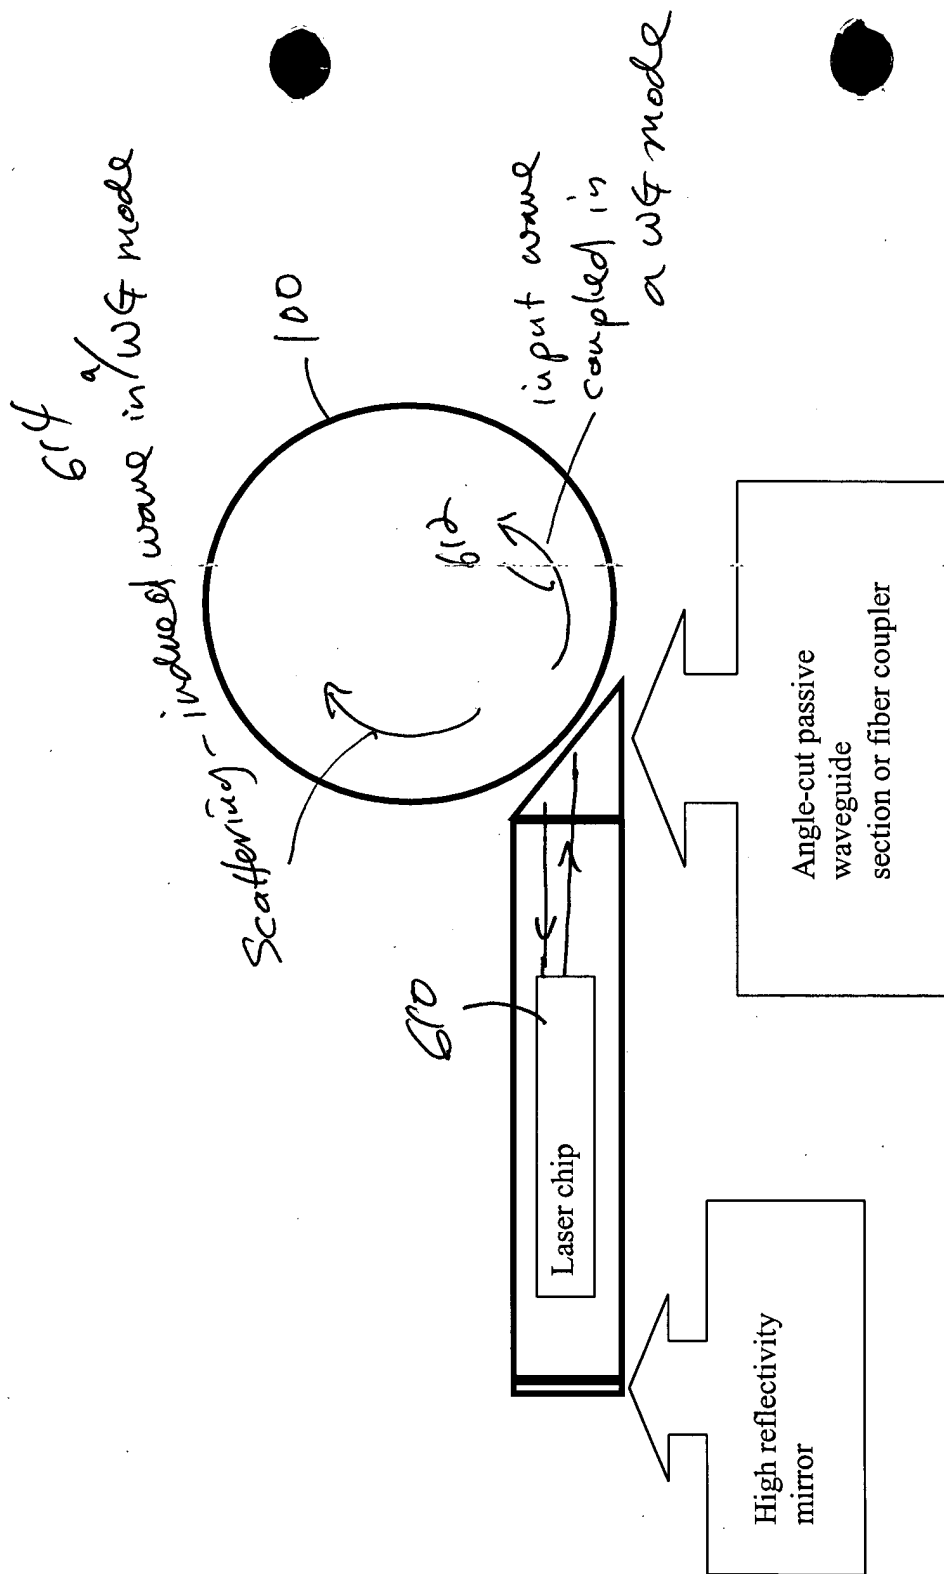


FIG. 6B

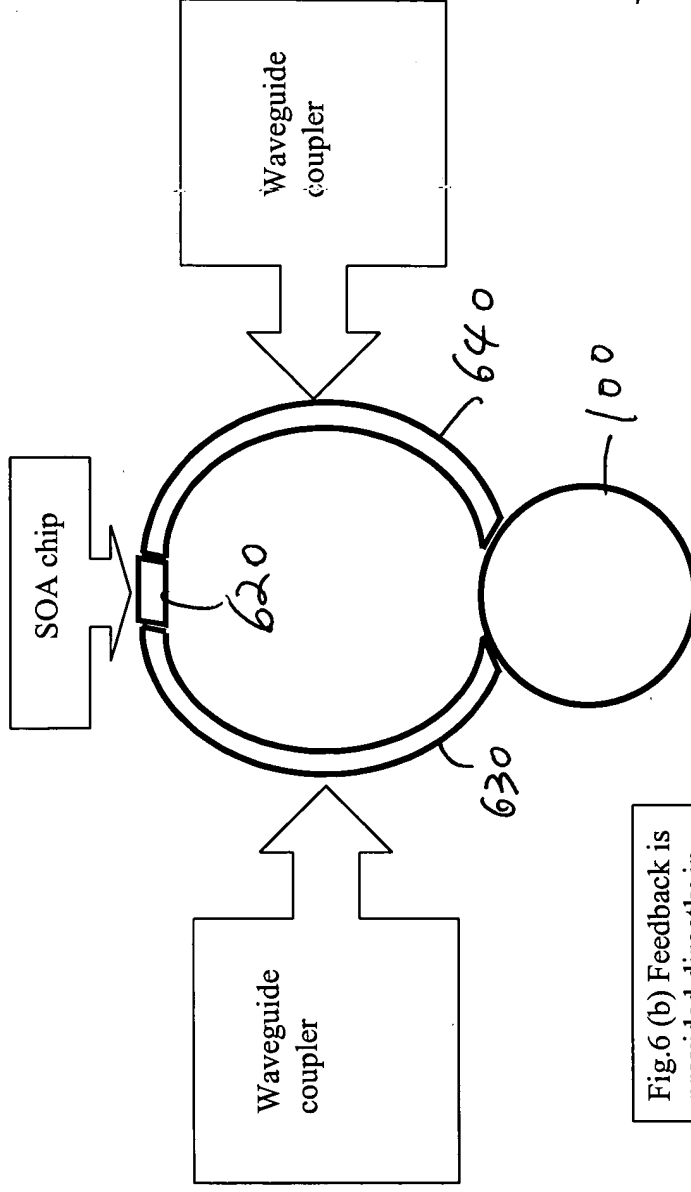


Fig.6 (b) Feedback is provided directly in the closed loop, by the second evanescent optical coupler and waveguide